

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number  
**WO 02/40825 A1**

(51) International Patent Classification<sup>7</sup>: **E21B 29/00**,  
43/10, B21D 39/10

(21) International Application Number: PCT/GB01/05068

(22) International Filing Date:  
16 November 2001 (16.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0028041.2 17 November 2000 (17.11.2000) GB

(71) Applicant (for all designated States except US): **WEATHERFORD/LAMB, INC.** [US/US]; c/o CSC, The United States Corporation Company, 1013 Centre Road, Wilmington, DE 19805 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LAWRENCE, Lewis** [GB/GB]; The Home Farm House, Kemnay, Aberdeenshire AB51 5LH (GB).

(74) Agents: **McCALLUM, William, Potter et al.**; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EXPANDER

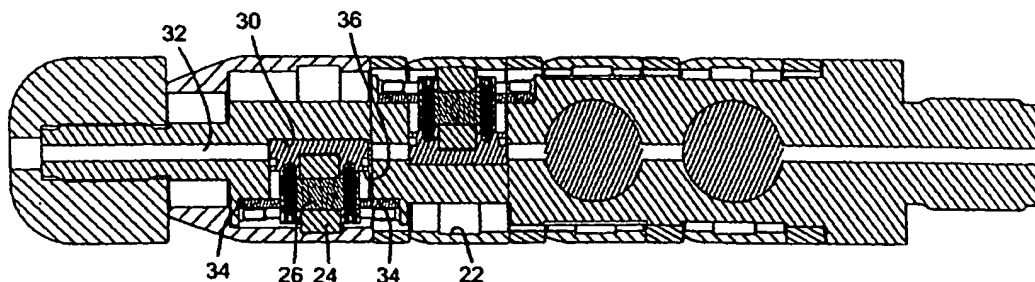

(57) Abstract: A tubing expander (10) comprises a body (12) carrying a plurality of radially movable piston-mounted rollers (24) and associated sleeves (16) mounted about the body (12) and being radially supported by the rollers (12). The expander (10) is positioned in a length of tubing of a first diameter, the pistons (28) extended, and the expander (10) rotated such that the sleeves (16) roll around the inner surface of the tubing and expand the tubing to a larger second diameter.

WO 02/40825 A1

BEST AVAILABLE COPY

EXPANDER

This invention relates to an expander primarily intended for use in expanding tubing downhole.

It has been proposed to use a roller expander to expand slotted and solid tubing in drilled bores, and in particular in oil and gas wells, such as described in, for example, WO 00/37767, WO 00/37768 and WO 00/37771. A typical roller expander comprises a body carrying a number of radially movable rollers. The rollers may be mounted on pistons or cones such that elevated internal fluid pressure or axial force may be applied to the expander to urge the rollers radially outwardly into contact with a surrounding expandable tube. By simultaneously rotating and advancing the expander a length of tubing may be expanded from a first diameter to a larger second diameter.

It is among the objectives of embodiments of the present invention to provide an improved roller expander for use in such applications:

According to a first aspect of the present invention there is provided a tubing expander comprising a body carrying at least one radially movable expansion member and a sleeve mounted about the body and being radially supported by the expansion member.

The invention also relates to a method of expanding tubing comprising the steps:

providing a tubing expander comprising a body carrying

at least one radially movable expansion member and a sleeve mounted about the body and being radially supported by the expansion member;

5 locating the expander in a tubing section of a first diameter;

radially extending the expansion member to urge a portion of the sleeve into contact with an internal surface of the tubing section; and

10 rotating the expander such that the sleeve is rolled around the internal surface of the tubing section and expands the tubing section to a larger second diameter.

The invention has particular application in expansion of slotted expandable tubing, in which an unexpanded tubing section features a plurality of overlapping axial slots.

15 Expansion of the tubing is accommodated, at least in part, by bending of the fingers or webs of material between the slots, such that in the expanded tubing the slots assumed a diamond shape. With conventional roller expanders, featuring generally cylindrical rollers or balls mounted

20 around an expander body, the relatively small diameter rollers or balls tend to drop into the slots, that is as the expander rotates and a ball encounters a slot, the ball will be pushed outwardly into the slot and must then be pushed inwardly out of the slot, against the ball actuating

25 force, to allow the ball to move past the slot. The circumference of a typical slotted tube may feature nine slots, and when an expander is being rotated within such a pipe at, for example, 250 rpm, the expander and string will

experience a degree of vibration. However, in the present invention the sleeve has a relatively large diameter, such that the sleeve will not drop into the slots to the same extent; the sleeve will tend to bridge the slots, such that the rotating expander experiences less vibration and requires a lower torque to rotate the expander. Of course the expander may be utilise to expand other forms of tubing, including but not limited to solid-walled tubulars, tubulars with other slot patterns, tubulars with holes of a variety of sizes and patterns, tubulars with purposely machined or cast "defects", such as zones of thinned wall, and tubulars which have been longitudinally folded or corrugated into various forms.

Although reference is made above to a tubing section of a first diameter, the invention is not limited to use in tubulars which are initially cylindrical, and as noted above may be utilised in one or both of the unfolding and radial expansion of tubulars which have been longitudinally folded or corrugated into various forms. Further, the invention may be used independently or in combination with other unfolding or expansion tools, devices or mechanisms.

The portion of the tubing section subject to deformation may be relatively short, for example to create a patch or straddle, or to create a hanger or a seal. Alternatively, the tubing section may be of considerable length.

Preferably, the expander comprises a plurality of radially movable expansion members and associated sleeves.

In a preferred embodiment, four sets of expansion members and sleeves are provided. Adjacent expansion members are preferably circumferentially offset. In a preferred embodiment, a first set of two adjacent expansion members are mutually offset by  $180^\circ$ , and a second set of two members are mutually offset by  $180^\circ$  and the first and second sets are offset by  $90^\circ$ . Conveniently, the leading sleeve features a tapered leading end, and may be relatively long. The other sleeves may also feature tapered leading ends. The diameter of the sleeves may increase from the leading end of the expander. Of course particular applications of the expander may require or benefit from the provision of particular numbers of sets of sleeves and members, particular sleeve configurations, and particular expansion member offsets.

The sleeve axis may be adapted to remain parallel to the axis of the tubing section as the sleeve rotates. In such an arrangement it is necessary to apply an external axial force to move the expander axially through the tubing section. Alternatively, the sleeve axis may be skewed relative to the axis of the tubing section, in which case the rotating sleeve, in contact with the tubing section, will act in a similar manner to a screw thread and thus induce an axial force on the expander, minimising or obviating the requirement to apply an axial force to advance the expander. The outer surface of the sleeve may define a contact surface, such as a helical profile or screw thread, to facilitate creation and transfer of axial

force.

Preferably, the expansion members comprise pistons mounted in corresponding blind recesses in the expander body. The recesses may communicate with an axial fluid passage in the body. Conveniently, the recesses are  
5 cylinders, facilitating cutting of the cylinders in the body. Most preferably, the expansion members further comprise rollers mounted on piston-mounted axles. Preferably, the axles extend axially of the expander body.

10 Preferably, the body defines a leading end dimensioned to be a snug fit in the tubing section to be expanded, to stabilise the expander in the tubing.

These and other aspects of the present invention will now be described, by way of example, with reference to the  
15 accompanying drawings, in which:

Figure 1 is a perspective view of a tubing expander in accordance with a preferred embodiment of the present invention;

Figure 2 is a side view of the expander of Figure 1;

20 Figure 3 is an enlarged sectional view on line 3 - 3 of Figure 2;

Figure 4 is a sectional view of the expander of Figure 1;

25 Figure 5 is a perspective view of the expander of Figure 1, shown in the actuated configuration;

Figure 6 is a side view of the actuated expander of Figure 5;

Figure 7 is an end view of the actuated expander of

Figure 5;

Figure 8 is a sectional view on line 8 - 8 of Figure 6; and

Figure 9 is a sectional view of the expander of Figure 5.

Figures 1 to 4 of the drawings illustrates a tubing expander 10 in accordance with a preferred embodiment of the present invention, shown in a retracted configuration. Figures 5 to 9 of the drawings illustrate the expander 10 in an actuated or extended configuration. The expander 10 comprises an elongate body 12 adapted for mounting on the end of an appropriate tubular running string (not shown). The leading end of the body carries a rounded nose 14 which is dimensioned to be a snug fit in a tubing section 11 which the expander 10 will be utilised to expand.

Mounted around the expander body 12 are four cylindrical sleeves 16. The sleeves 16 are spaced apart and are located on the body 12 by thrust collars 18 releasably secured to the body 12 by appropriate threaded pins 20. Each sleeve 16 defines an internal circumferential channel 22 (Figures 4 and 9) which co-operates with a respective piston-mounted roller 24. Each roller 24 is mounted on an axle 26 pinned to an outer end of a respective piston 28, each piston being radially movable in a blind cylinder 30 formed in the body 12. Each cylinder 30 intersects an axial fluid passage 32 which extends through the expander body 12. Thus, an increase of fluid pressure within the passage 32 tends to urge the

pistons 28, and thus the rollers 24, radially outwardly. The maximum radial travel of each piston 28 is determined by a pair of plates 34 pinned to the body 12 and which are adapted to engage a step 36 defined on the piston 28.

5           Radial extension of a piston 28 carries the respective sleeve 16 to a position in which the sleeve axis is offset from the body axis, as is perhaps best illustrated in Figure 8. The body 12 is profiled to permit such movement of the sleeves 16, the opposite face of the body 36 at each  
10       piston defining an arc of diameter corresponding to that of the sleeve 16. This movement and offsetting of the sleeves 16 results in the actuated expander 10 describing a significantly greater diameter than the retracted expander, and thus a diameter greater than the individual sleeves  
15       themselves.

          The leading sleeve 16a is relatively long in comparison to the other sleeves 16b-d, and also features a tapering leading end 38 to facilitate the initial expansion of a tubing section 11 from an inner diameter corresponding  
20       to the outer diameter of the expander nose 14.

          In use, the expander 10 is mounted on the end of a running string, together with a motor, and run into a bore. The expander 10 may be run into the bore together with a section of tubing to be expanded, or may be run into tubing  
25       section already located within a bore. The expander 10 has particular application in expanding axially slotted tubing, such as sold under the EST trade mark by the applicant, and as featured in a range of other expandable products



supplied by the applicants, such as the sandscreens sold under the ESS trade mark. On reaching the location in the bore where the tubing is to be expanded, at least the tubing nose 14 is located in the upper or trailing end of the tubing 11. The fluid pressure within the passage 32 is then increased to extend the pistons 28, and to urge the sleeves 16 towards the fully extended positions as shown in Figures 5 to 9. The expander 10 is then rotated and advanced axially into the tubing 11. The sleeves 16 are urged into contact with the internal surface of the tubing 11 and expand the tubing to a larger second diameter. The presence of four mutually offset sleeves 16 (the leading pistons and rollers are arranged to offset the extended sleeve 16a, 16b by 180°, the trailing sleeves 16c, 16d are similarly mutually offset, and the leading and trailing sleeve sets 16a, 16b and 16c, 16d are offset by 90°/270°) serves to stabilise the expander 10 in the tubing and provides for a progressive expansion of the tubing.

As will be apparent to those of skill in the art, the relatively large diameter of the sleeves 16 results in the sleeves 16 bridging the slots in the tubing 11, even as the circumferential extent of the slots increases as the tubing is expanded. This reduces the vibration experienced by the rotating expander 10, and also reduces the torque necessary to rotate the expander 10.

It will further be apparent to those of skill in the art that the above described embodiment is merely exemplary of the present invention, and that various modifications

and improvements may be made thereto without departing from the scope of the invention. For example, the expander may be mounted on any appropriate support, such as coil tubing, in combination with a downhole motor for rotating the expander, or a string of drill pipe, allowing the expander  
5 to be rotated from surface. Further, while the present invention has particular application in expanding slotted tubing downhole, the expander may be used in the expansion of other tubing forms, and in other situations.

CLAIMS

1. A tubing expander comprising:
  - a body adapted for rotation within tubing to be expanded;
  - 5 at least one radially movable expansion member mounted on the body; and
  - a sleeve mounted about the body and being radially supported by the expansion member, the sleeve being adapted to be offset from the body when the expansion member is actuated to provide a rolling contact with an inner surface of tubing to be expanded as the body is rotated within the tubing.
- 10 2. The expander of claim 1, in combination with a section of expandable tubing.
- 15 3. The expander of claim 1, in combination with a section of expandable tubing which defines a plurality of openings before or following expansion.
- 20 4. The expander of claim 2 or 3, wherein the body defines a leading end dimensioned to be a snug fit in the tubing section.

5. The expander of claim 1, 2, 3 or 4, wherein the expander comprises a plurality of radially movable expansion members and associated sleeves.

6. The expander of claim 5, wherein four sets of expansion members and sleeves are provided.

7. The expander of claim 5 or 6, wherein adjacent expansion members are circumferentially offset.

8. The expander of claim 7, wherein a first set of two adjacent expansion members are mutually offset by 180°, and a second set of two expansion members are mutually offset by 180°, and the first and second sets of expansion members are offset by 90°.

9. The expander of any of claims 5 to 8, wherein at least one of the sleeves has a tapered leading end.

10. The expander of any of claims 5 to 9, comprising a leading sleeve having a tapered leading end.

11. The expander of any of claims 5 to 10, comprising a leading sleeve which is longer than the other sleeves.

12. The expander of any of claims 5 to 11, wherein the sleeves increase in diameter from the leading end of the expander.

13. The expander of any of the preceding claims, wherein the expansion member is fluid actuated.
14. The expander of any of the preceding claims, wherein the expansion member comprises a piston mounted in a corresponding recess in the expander body.
15. The expander of claim 14, wherein the recess communicates with an axial fluid passage in the body.
16. The expander of claim 14 or 15, wherein the recess is substantially cylindrical.
17. The expander of any of the preceding claims, wherein the expansion member comprises a roller for engaging an inner face of the sleeve.
18. The expander of claim 17, wherein the roller is mounted on an axle extending axially of the expander body.
19. The expander of any of the preceding claims, wherein the sleeve axis is adapted to remain parallel to the axis of a tubing section as the sleeve rotates therein.
20. The expander of any of claims 1 to 18, wherein the sleeve axis is adapted to be skewed relative to the axis of a tubing section as the sleeve rotates therein, whereby rotation of the sleeve, in contact with a tubing section,

induces an axial force on the expander.

21. The expander of any of the preceding claims, wherein the outer surface of the sleeve defines a contact surface adapted to facilitate creation and transfer of axial force  
5 between the sleeve and a tubing section as the sleeve rotates therein.

22. A method of expanding tubing comprising the steps:  
providing a tubing expander comprising a body carrying  
at least one radially movable expansion member and a sleeve  
10 mounted about the body and being radially supported by the expansion member;

locating the expander in a tubing section of a first diameter;

radially extending the expansion member to urge a  
15 portion of the sleeve into contact with an internal surface of the tubing section; and

rotating the expander such that the sleeve is rolled around the internal surface of the tubing section and expands the tubing section to a larger second diameter.


20 23. The method of claim 22, comprising expanding the tubing section downhole.

24. The method of claim 22 or 23, wherein the tubing section is slotted expandable tubing and expansion of the tubing enlarges the slots.

14

25. The method of claim 22, 23 or 24, comprising stabilising the tubing section on the expander by locating a leading end of the stabiliser in the unexpanded tubing section.

1/9

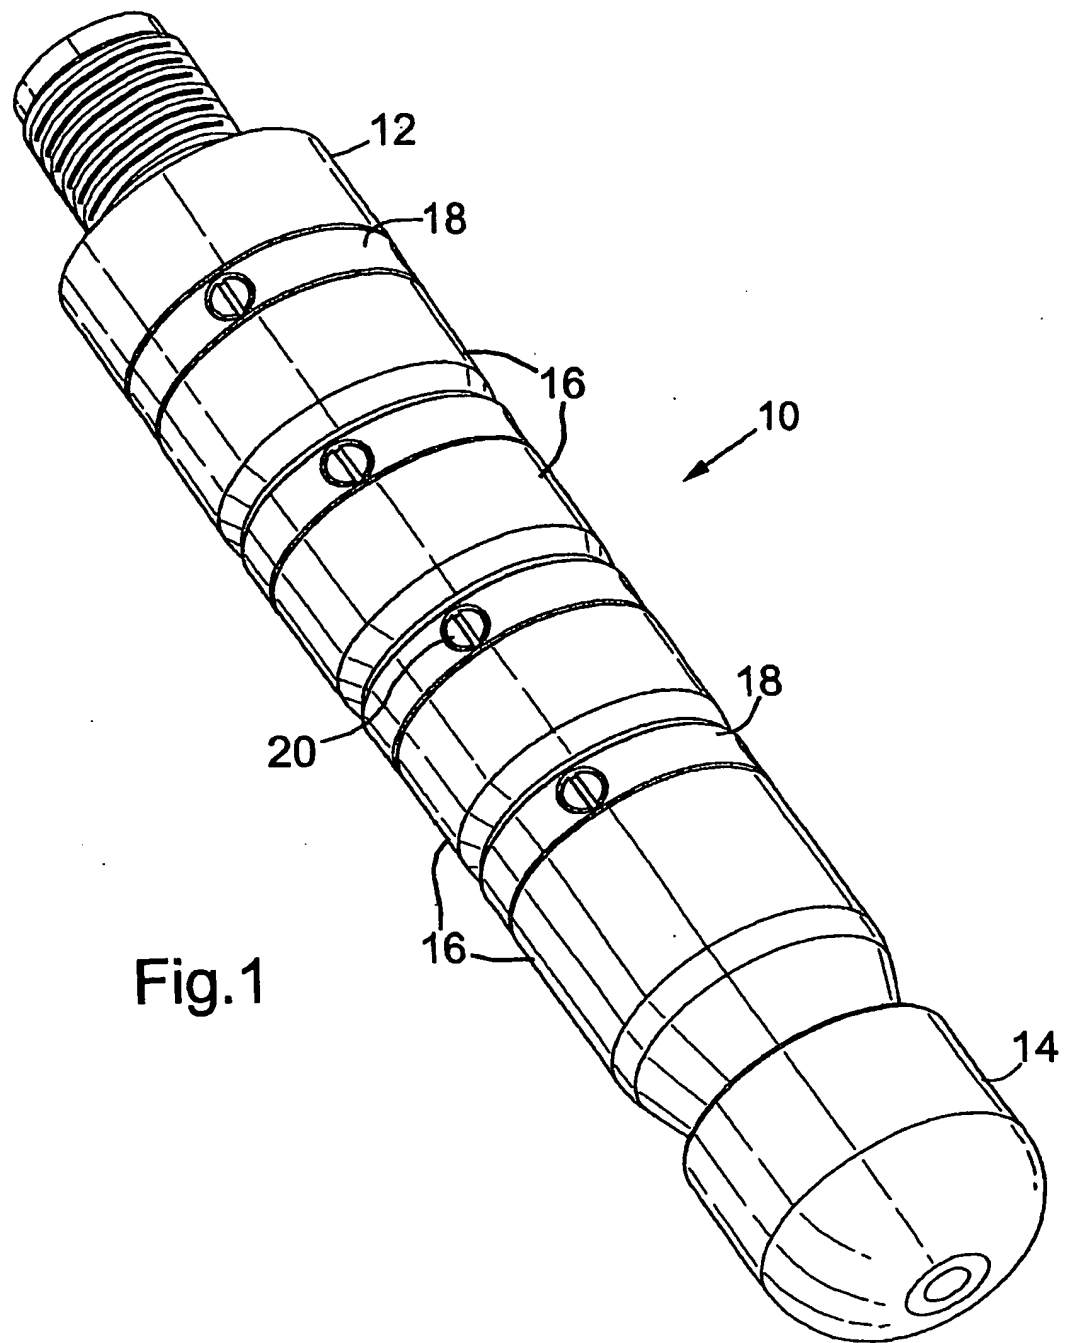



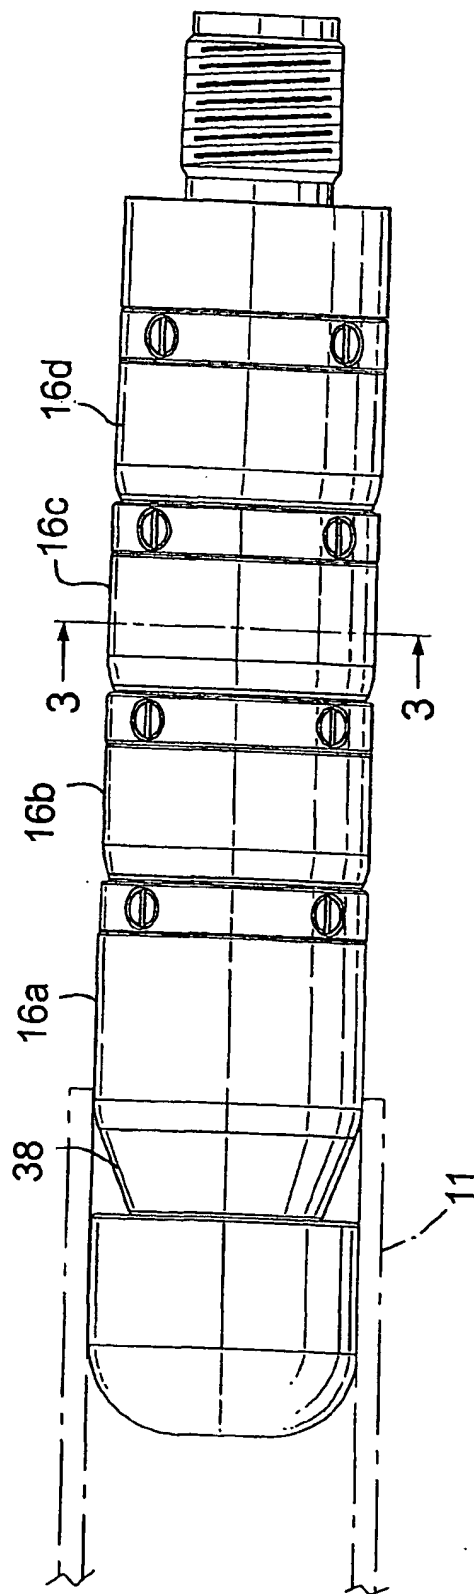


Fig.2

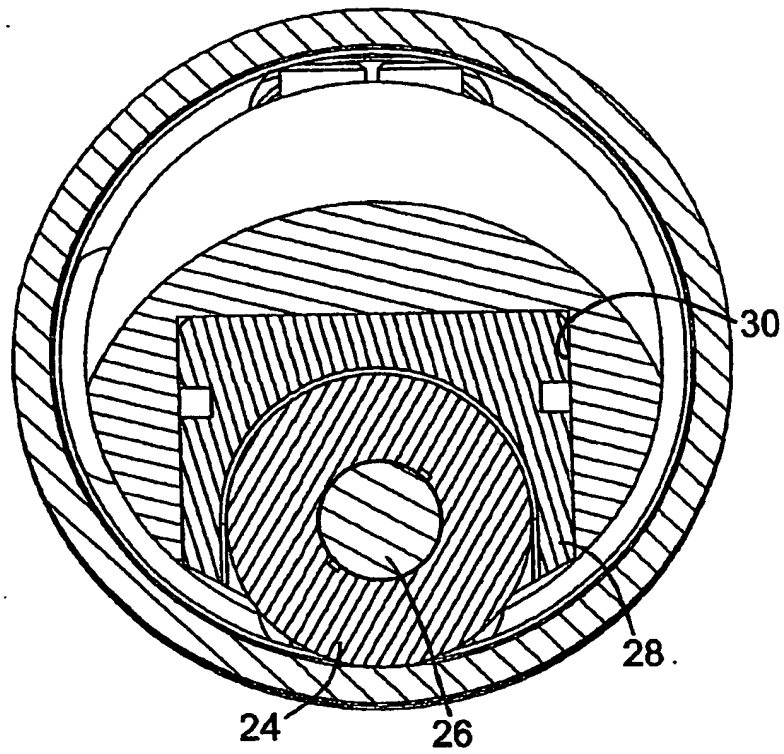


Fig.3

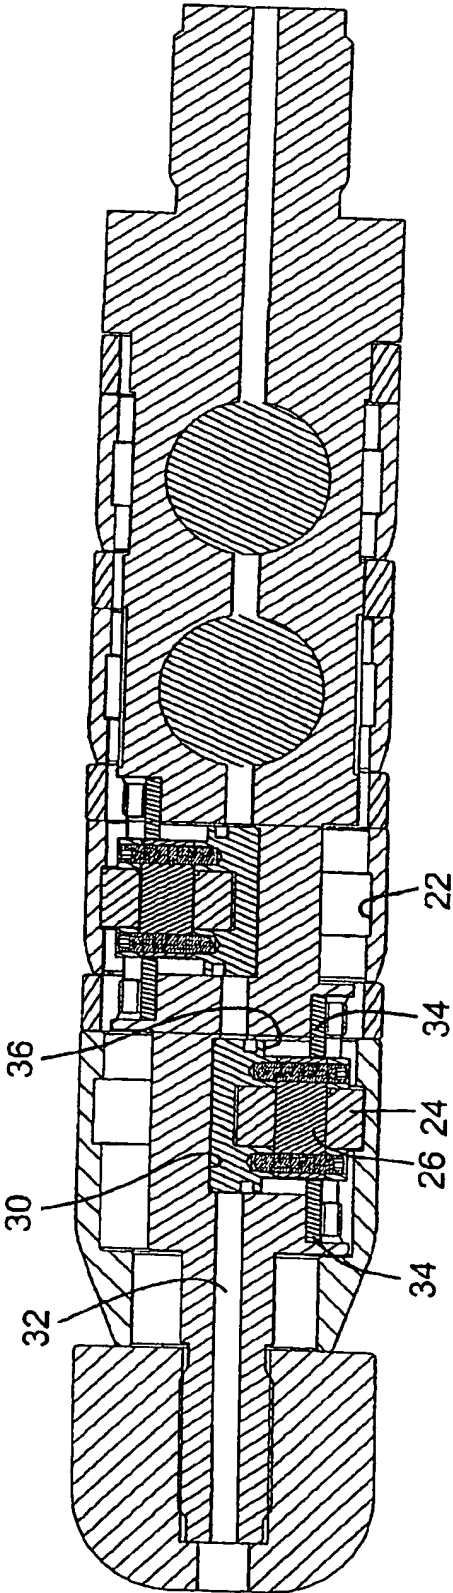


Fig.4

5/9

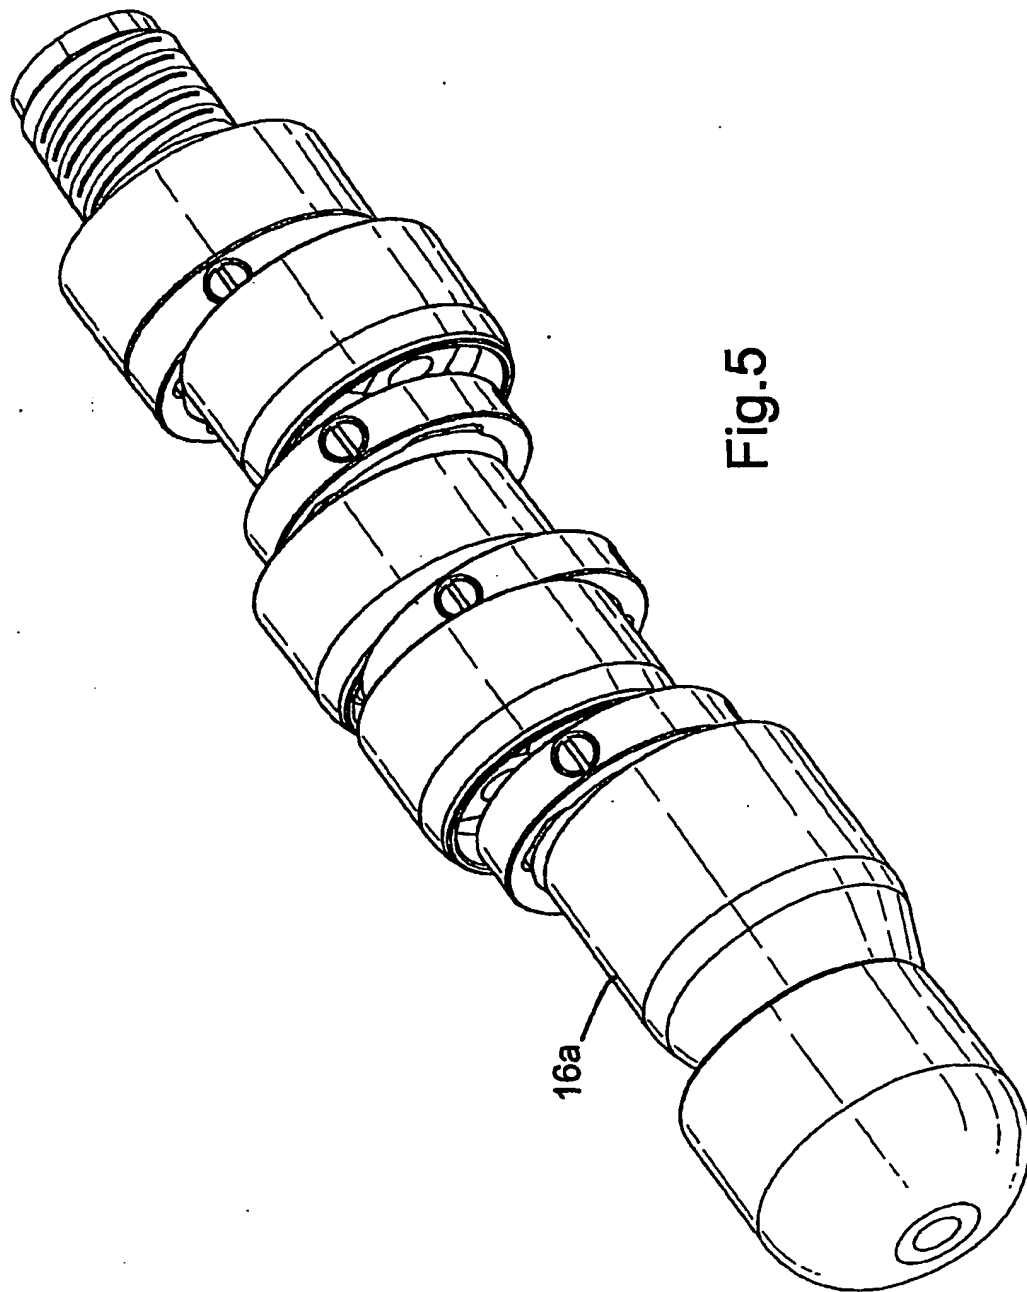


Fig. 5

6/9

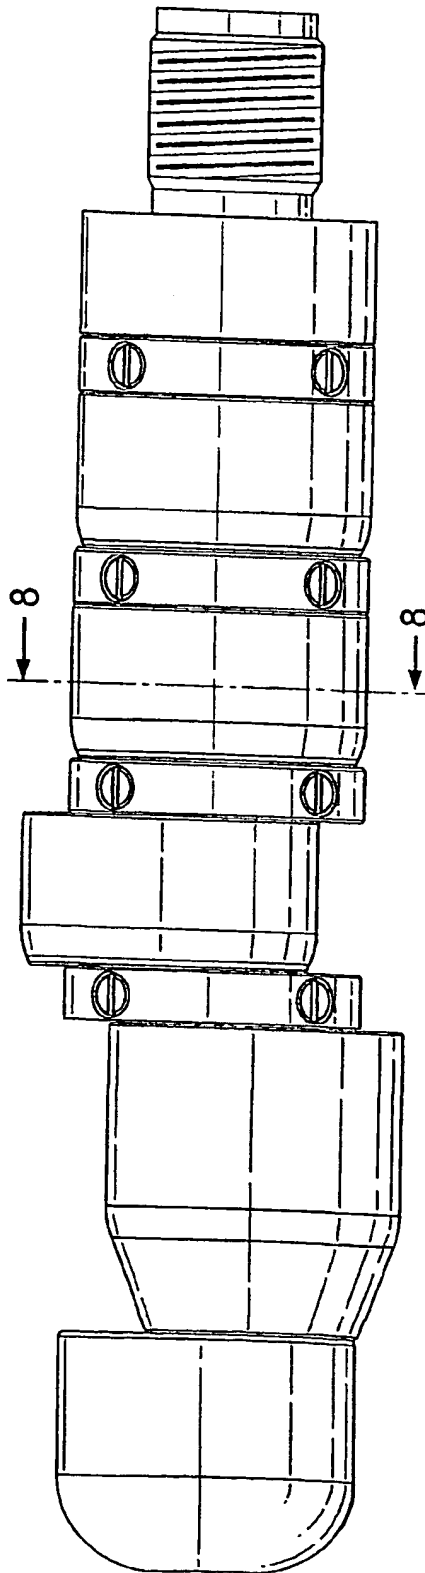


Fig.6

7/9

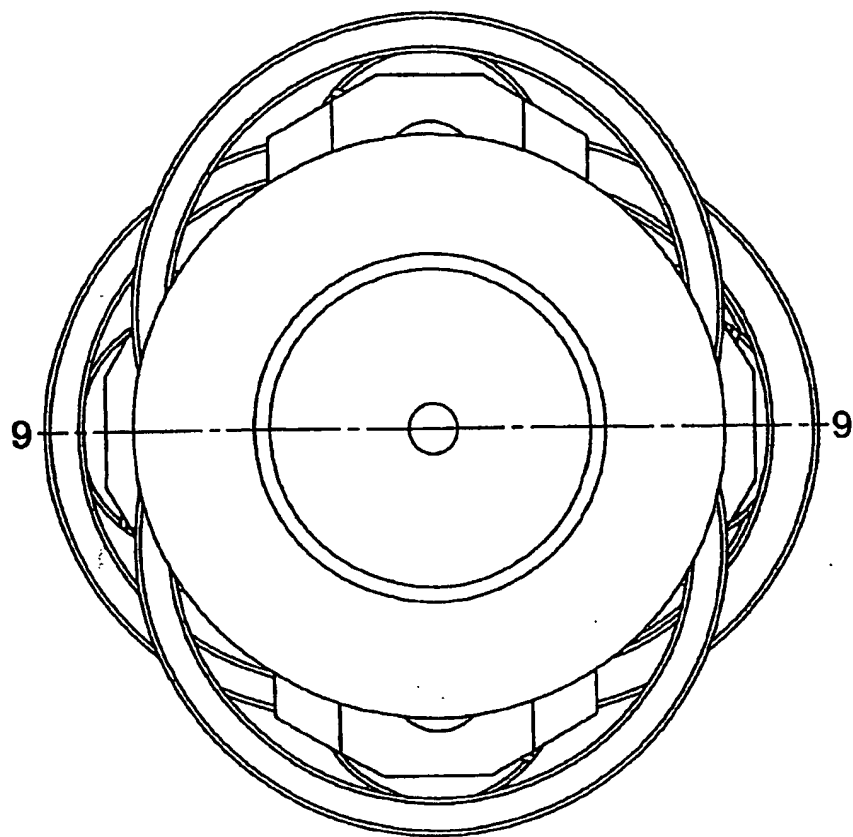


Fig.7

8/9

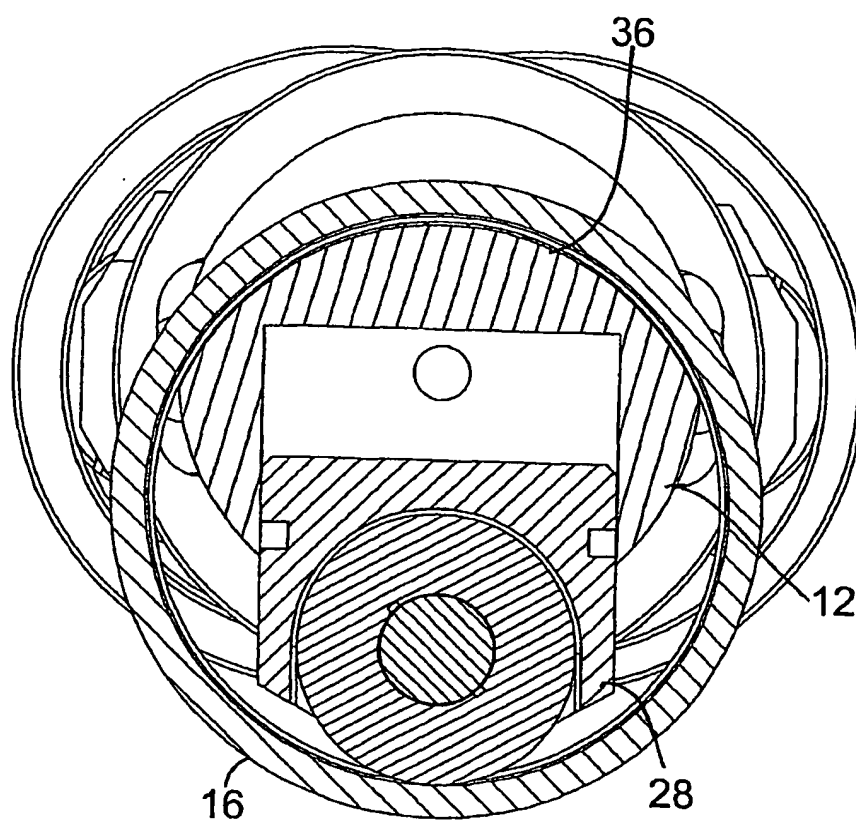


Fig.8

9/9

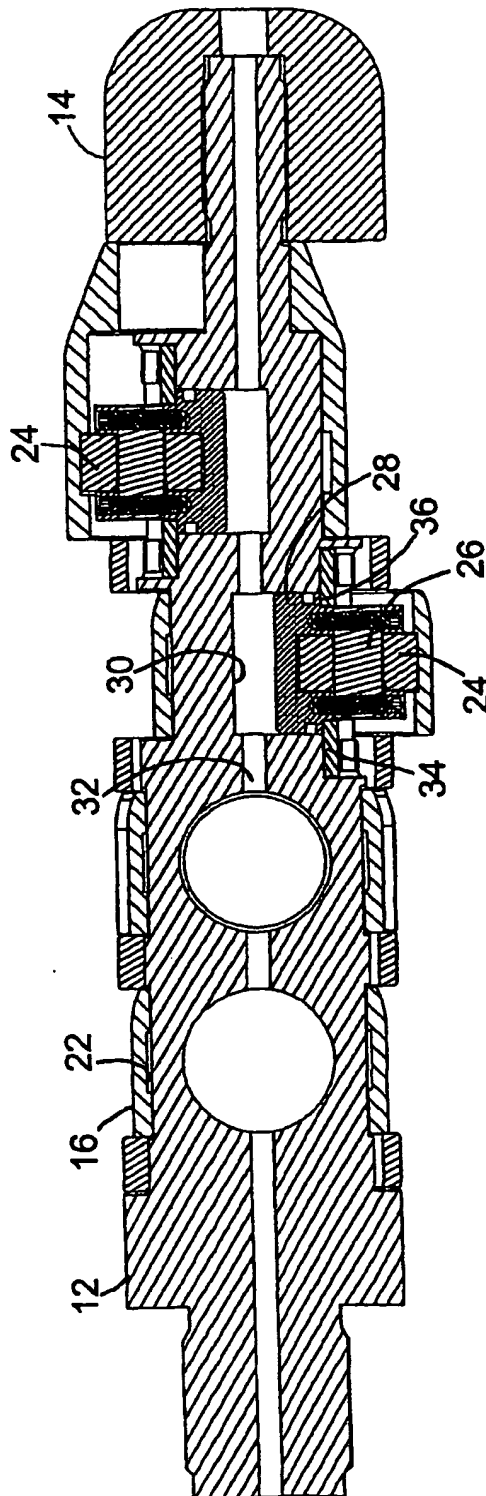


Fig.9



# INTERNATIONAL SEARCH REPORT

International Application No  
PC 17 GB 01/05068

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 E21B29/00 E21B43/10 B21D39/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 E21B B21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 011 036 A (COLMERAUER ANDREW J) 13 August 1935 (1935-08-13) page 1, left-hand column, line 54 -page 2, left-hand column, line 21; figures	1,22
A	WO 00 37766 A (ASTEC DEV LTD ;SIMPSON NEIL ANDREW ABERCROMBI (GB)) 29 June 2000 (2000-06-29) page 30, line 3-17; figure 22	1,22
A	US 2 600 800 A (PACE GEORGE W ET AL) 17 June 1952 (1952-06-17) figures	1,22
A	US 2 690 783 A (COLMERAUER ANDREW J) 5 October 1954 (1954-10-05) figures	1,22

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

1 March 2002

Date of mailing of the international search report

11/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Weiland, T

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 01/05068

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2011036	A	13-08-1935	NONE	
WO 0037766	A	29-06-2000	AU 1867900 A	12-07-2000
			AU 1868700 A	12-07-2000
			AU 1868800 A	12-07-2000
			AU 1868900 A	12-07-2000
			AU 1876600 A	12-07-2000
			AU 1876800 A	12-07-2000
			EP 1147287 A2	24-10-2001
			EP 1141517 A1	10-10-2001
			EP 1141515 A1	10-10-2001
			EP 1144802 A2	17-10-2001
			EP 1151180 A1	07-11-2001
			EP 1141518 A1	10-10-2001
			WO 0037766 A2	29-06-2000
			WO 0037771 A1	29-06-2000
			WO 0037768 A1	29-06-2000
			WO 0037767 A2	29-06-2000
			WO 0037772 A1	29-06-2000
			WO 0037773 A1	29-06-2000
			GB 2345308 A	05-07-2000
			GB 2346632 A	16-08-2000
			GB 2346400 A	09-08-2000
			GB 2346909 A	23-08-2000
			GB 2347445 A	06-09-2000
			NO 20012596 A	27-07-2001
			NO 20012597 A	27-07-2001
			NO 20012598 A	30-07-2001
			NO 20012599 A	30-07-2001
			NO 20012600 A	30-07-2001
			NO 20012865 A	07-08-2001
US 2600800	A	17-06-1952	NONE	
US 2690783	A	05-10-1954	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**